

Information

HIOKI

NEW

CLAMP ON EARTH TESTER FT6380, FT6381

Field Measuring Instruments



**Easy pole earth resistance measurement
with super slim jaw**



**Easy Open Jaw
Light Weight**

High Accuracy

**0.02 Ω to 1600 Ω wide measurement range for earth resistance measurement
1.00 mA to 60.0 A covering small leakage current to load current**

For multi grounded systems only



ISO 9001
JMI-0216



ISO 14001
JQA-E-90091



www.hioki.com

Hioki company overview, new products, environmental considerations and other information are available on our website.



True RMS

CAT IV 600 V

Get Things Done with Super Slim Jaws

Easy clamping!

Open jaws easily with just two fingers. Only half the grip power is needed compared to typical clamp earth testers.



Clamp at the narrowest point!

Now you can easily clamp the earth cable on the pole without digging. The dramatically slim 0.79 inch (20mm) jaws let you finish your job easily and efficiently.



0.87 inch
(22 mm)

0.79 inch
(20 mm)

1.5 inch
(38 mm)
0.87 inch
(22 mm)



Also equipped with Clamp check safety function.

Quick Start!

No wait time after powering on. Start measuring instantly without zero-calibration.

High Accuracy and Repeatability

Well-designed magnetic shields eliminate the leakage flux between the two cores that often affect measurement accuracy.

Alarm Function

Set the alarm to audibly and visually notify you that the resistance or current value exceeds the threshold.



LCD with beautiful back light


With the bright back light, you can easily read the measurement value even in dark locations.



Large storage capacity (up to 2,000 data)

You can store up to 2,000 measurement values in the field and recall them in your office later.

Memory number



Filter function enables even more accurate measurements

Resistant mode filter: digital filter gives you steadier readings.

Current mode filter: Low-pass filter eliminates harmonics current over 180Hz.

Automatic Report Generation

Model FT6381 can create reports instantly in the field using an Android™ phone via a Bluetooth® wireless technology.



For the U.S./Canada/Europe/Japan only

1 Real time data transfer

2 Automatic Report Generation on your Android™ phone

3 Download data

Report includes the Measurement Value, Date and Time, Map with GPS information and Pass/Fail information

After making a report, you can see it on the Android™ phone or send the data to your PC at the office via e-mail.



Via e-mail



Field

Measured Data




Office



Measurement Principle

FT6380/6381 can measure Multi-Grounded systems.

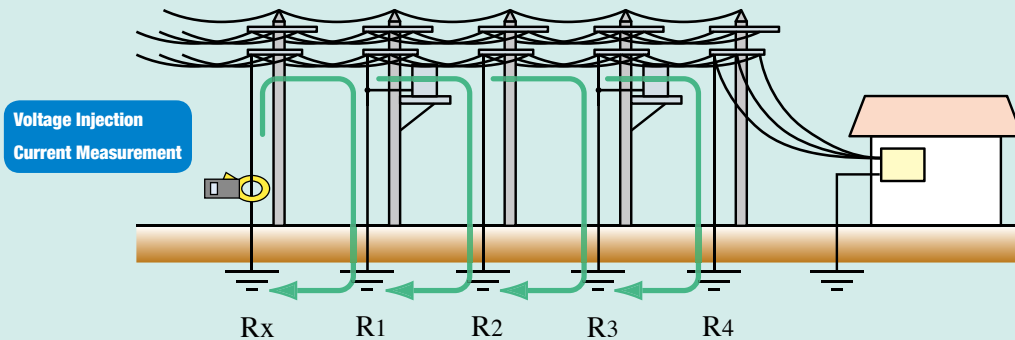

Clamp on the earth cable. The instrument has two cores for voltage injection and current measurement.

1. The voltage transducer injects a defined voltage into the multi-grounded system.
2. From the defined voltage and measured current, the total circuit loop resistance is calculated in the following equation.

$$R_x + \frac{1}{\frac{1}{R_1} + \frac{1}{R_2} + \frac{1}{R_3} + \frac{1}{R_4} \dots} = \frac{V}{I}$$

In a typical multi-grounded system, the parallel resistance value is small enough to be ignored and the equation as referred above can be simulated as follows.

$$R_x = \frac{V}{I}$$

Specifications

Display	Digital/ LCD, max. 2000 digits Display update rate: 2 times / s
Maximum conductor diameter for measurement	ø 32 mm (1.26 in)
Power supply	LR6 alkaline battery × 2
Continuous operating time	35 hours With display backlight off, Bluetooth OFF (FT6381)
Auto power save	Power save state when 5 minutes have elapsed since the last operation
Operating temperature and humidity	-10°C (14°F) to 50°C (122°F), 80 % rh or less (no condensation)
Storage temperature and humidity (no condensation, except batteries)	-20°C (-4°F) to 60°C (140°F), 80 % rh or less
Dustproof and waterproof	IP40 (EN60529) With Jaws Closed
Temperature characteristics	In -10°C (14°F) to 50°C (122°F) range: add 0.1 × Measurement accuracy / °C
Withstand voltage	AC 7400 Vrms for one minute Between clamp sensor and casing
Maximum input current	AC 100 A continuous, AC 200 A 2 minute (50 / 60Hz)
Applicable standards	Safety: EN61010 EMC: EN61326 Wireless (For FT6381 only): FCC Part 15.247, IC RSS-210, EN 300 328, 301 489-1, 301-489-17
Dimensions, Mass	Approx. 73 mm (2.87 in) W × 218 mm (8.58 in) H × 43 mm (1.69) D , Approx 620 g (21.9 oz)
Accessories	Carrying Casex1, Resistance Check Loopx1, Strapx1, Instruction Manualx1 Alkaline Battery(LR6)x2

FT6381 Interface

Interface	Bluetooth® v2.1+EDR
Communication Distance	10 m (Class 2.1)
Communication Protocol	SPP (Serial Port Profile)
Compatibility	Smartphone/ Tablet (Android™)
Applicable OS	Android™ 2.1 or later

Accessories



Resistance Check Loop



Carrying Case

Resistance mode Accuracy guaranteed for 1 year (self calibration is also possible)
Temperature and humidity for guaranteed accuracy: 23±5°C 80%rh or less (no condensation)

Range	Measurement Range	Resolution	Accuracy
0.20 Ω	0.02 Ω to 0.20 Ω	0.01 Ω	±1.5 % rdg. ±0.02 Ω
2.00 Ω	0.18 Ω to 2.00 Ω	0.01 Ω	±1.5 % rdg. ±0.02 Ω
20.00 Ω	1.80 Ω to 20.00 Ω	0.01 Ω	±1.5 % rdg. ±0.05 Ω
50.0 Ω	18.0 Ω to 50.0 Ω	0.1 Ω	±1.5 % rdg. ±0.1 Ω
100.0 Ω	50.0 Ω to 100.0 Ω	0.1 Ω	±1.5 % rdg. ±0.5 Ω
200.0 Ω	100.0 Ω to 200.0 Ω	0.2 Ω	±3.0 % rdg. ±1.0 Ω
400 Ω	180 Ω to 400 Ω	1 Ω	±5 % rdg. ±5 Ω
600 Ω	400 Ω to 600 Ω	2 Ω	±10 % rdg. ±10 Ω
1200 Ω	600 Ω to 1200 Ω	10 Ω	±20 % rdg.
1600 Ω	1200 Ω to 1600 Ω	20 Ω	±35 % rdg.

Frequency of measurement Apporox 2,400Hz.

Current Mode Accuracy guaranteed for 1 year (self calibration is also possible)
Temperature and humidity for guaranteed accuracy: 23±5°C 80%rh or less (no condensation)

Range	Measurement Range	Resolution	Frequency Ragne	Accuracy	
				Filter off	Filter on
20.00 mA	1.00 mA to 20.00 mA	0.01 mA	45 ≤ f ≤ 66Hz	±2.0 % rdg. ±0.05 mA	±2.0 % rdg. ±0.05 mA
			30 ≤ f < 45Hz, 66 < f ≤ 400Hz	±2.5 % rdg. ±0.05m A	—
200.0 mA	18.0 mA to 200.0 mA	0.1 mA	45 ≤ f ≤ 66Hz	±2.0 % rdg. ±0.5 mA	±2.0 % rdg. ±0.5 mA
			30 ≤ f < 45Hz, 66 < f ≤ 400Hz	±2.5 % rdg. ±0.5m A	—
2.000 A	0.180 A to 2.000 A	0.001 A	45 ≤ f ≤ 66Hz	±2.0 % rdg. ±0.005 A	±2.0 % rdg. ±0.005 A
			30 ≤ f < 45Hz, 66 < f ≤ 400Hz	±2.5 % rdg. ±0.005 A	—
20.00 A	1.80 A to 20.00 A	0.01 A	45 ≤ f ≤ 66Hz	±2.0 % rdg. ±0.05 A	±2.0 % rdg. ±0.05 A
			30 ≤ f < 45Hz, 66 < f ≤ 400Hz	±2.5 % rdg. ±0.05 A	—
60.0 A	18.0 A to 60.0 A	0.1 A	45 ≤ f ≤ 66Hz	±2.0 % rdg. ±0.5 A	±2.0 % rdg. ±0.5 A
			30 ≤ f < 45Hz, 66 < f ≤ 400Hz	±2.5 % rdg. ±0.5 A	—

Bluetooth is a trademark of Bluetooth SIG, Inc. and licensed for use by HIOKI E.E. CORPORATION.

Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

HIOKI

HIOKI E. E. CORPORATION

Headquarters :

81 Koizumi, Ueda, Nagano, 386-1192, Japan
TEL +81-268-28-0562 FAX +81-268-28-0568
http://www.hioki.co.jp / E-mail: os-com@hioki.co.jp

HIOKI USA CORPORATION :

TEL +1-609-409-9109 FAX +1-609-409-9108
http://www.hiokiusa.com / E-mail: hioki@hiokiusa.com

HIOKI (Shanghai) Sales & Trading Co., Ltd. :

TEL +86-21-63910090 FAX +86-21-63910360
http://www.hioki.cn / E-mail: info@hioki.com.cn

Beijing Office :

TEL +86-10-84418761

FAX +86-10-84418763 / E-mail: info-bj@hioki.com.cn

Guangzhou Office :

TEL +86-20-38392673

FAX +86-20-38392679 / E-mail: info-gz@hioki.com.cn

Shenzhen Office :

TEL +86-755-83038357

FAX +86-755-83039160 / E-mail: info-sz@hioki.com.cn

HIOKI INDIA PRIVATE LIMITED :

TEL +91-731-6548081 FAX +91-731-4020083

E-mail: info@hioki.in

HIOKI SINGAPORE PTE. LTD. :

TEL +65-6634-7677 FAX +65-6634-7477

E-mail: info@hioki.com.sg

DISTRIBUTED BY